

Ares Series

PCB Mounted Pressure Transducers
Amplified Output
Differential and Gage Pressure
Temperature Compensated

DESCRIPTION

The **Ares Series** is a small, low cost pressure transducer, which is able to measure pressures as low as 0 to 5 inches of water, 0 to 10 inches of water, 0 to 15 inches of water, and 0 to 1 psi. Sensitivity to extremely low pressures combined with the small physical size make this device ideally suited for application such as HVAC, medical equipment, and flow monitoring.

The GA100 series has a 4V span from 0.50V to 4.50V and the GA200 series has a 3.75V span from 0.25V to 4.00V.

The plastic housing design for the Ares Series makes the device very user friendly. The housing is designed to be printed circuit board mountable, requiring no additional hardware. Built into the housing are self locking pins which insure a secure fit between the housing and the PCB. The pressure ports are 3/16" barbed ports which mate with industry standard 1/8" or 3/16" ID tubing. These ports are mounted 90° to the printed circuit board to allow other boards to be located above the sensor.

FEATURES

- ◆ Very Low Pressure Ranges
- ◆ Small Size
- ◆ PCB Mountable
- ◆ Solder Reflow Capability
- ◆ Barbed Pressure Ports
- ◆ Dry/Dry Differential Transducer

APPLICATIONS

- ◆ HVAC
- ◆ Medical Equipment
- ◆ Environmental Controls
- ◆ Portable Monitors
- ◆ Volume OEM Applications

The ARES series utilizes a unique sensor circuit design to provide ASIC digital error correction and signal amplification while maintaining an analog signal path. This technique delivers the high level of error correction associated with microprocessor-based circuits, while maintaining a typical bandwidth of >1 kHz generally found only in analog circuits. The result is a pressure sensor that offers the ultimate in low-cost and high accuracy, while preserving the fast response and smooth output inherent to silicon sensors.

The ASIC is a mixed signal CMOS sensor interface that uses differential switched capacitor architecture, and was specifically designed to compensate for the errors associated with piezoresistive silicon sensors. This ASIC design reduces the external parts requirement for calibration, allowing a smaller overall PCB size while maintaining outstanding performance characteristics. Due to its small size, barbed pressure ports, and solder re-flow capability, the Ares pressure transducer is ideally suited for a wide range of applications.



standard ranges

Ares Model Number	Operating Pressure	Accuracy %F50(1)
GA100-005WD	0 to 5" H ₂ O	0.25%
GA100-010WD	0 to 10" H ₂ O	0.5%
GA100-015WD	0 to 15" H ₂ O	0.5%
GA100-001PD	0 to 1 PSI	1.5%
GA200-005WD	0 to 5" H ₂ O	0.25%
GA200-010WD	0 to 10" H ₂ O	0.5%
GA200-015WD	0 to 15" H ₂ O	0.5%
GA200-001PD	0 to 1 PSI	1.5%

Note

1. Includes effects of non-linearity, hysteresis and repeatability.

深圳市新世联科技有限公司

Ares Series

performance specifications

Specifications for Port A pressure input

Supply Voltage: 5V


Ambient Temperature: 25°C (Unless otherwise specified)

PARAMETERS	GA100 SERIES			GA200 SERIES			UNITS	NOTES
	MIN	TYP	MAX	MIN	TYP	MAX		
Zero Offset	0.450	0.500	0.550	0.200	0.250	0.300	V	
Span	3.975	4.000	4.025	3.725	3.750	3.775	V	I
PARAMETERS	MIN	TYP	MAX	UNITS		NOTES		
Input voltage range	4.75	5.00	5.25	V		2		
Proof Pressure to any port				5	psi			
Burst Pressure	10			psi				
Common Mode Pressure				10	psi			
Long Term	-0.5			+0.5	%FSO/year			
Output Impedance				5	Ω			
Temperature Error - Span				1.5	%FSO		3	
Temperature Error - Zero				1.5	%FSO		3	
Media	Non-ionic, non-corrosive (clean, dry gases)							
Compensated Temperature	0° to 60°C							
Operating Temperature	-25° to 80°C							
Storage Temperature	-25° to 80°C							
Reflow Temperature	240°C (5 sec max)							



Notes

- Span is defined as the algebraic difference between the electrical output at full scale pressure voltage and the electrical output at zero pressure.
- Output is ratiometric to input voltage variation.
- Over compensated temperature range in reference to 25°C.
- Humidity: 95% non condensing.
- For differential applications, the input pressure to Port A must be higher than Port B.

dimensions

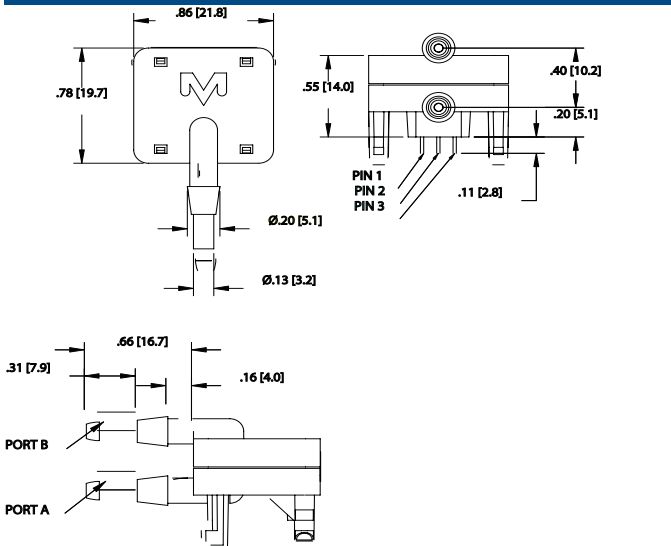

connections

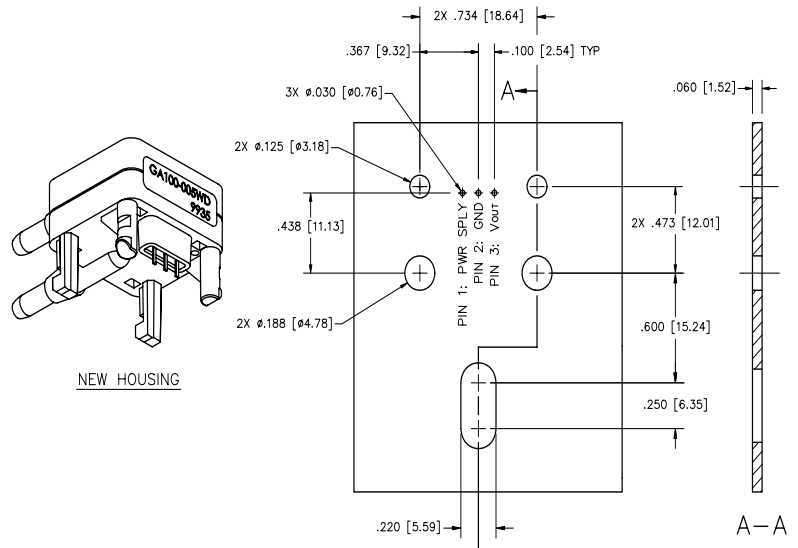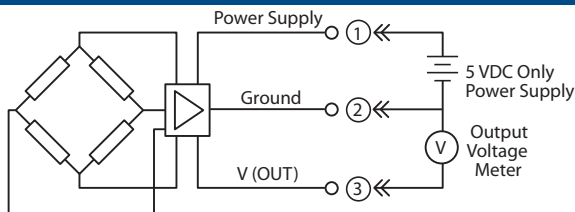

NOTE: OVAL CUT-OUT IS NOT NECESSARY WHEN MOUNTING SENSOR ON EDGE OF PCB w/PRESSURE PORTS FACING AWAY FROM PCB

CIRCUIT BOARD HOLE PATTERN
COMPONENT SIDE

ordering information

GA 100 - 005WD
 Pressure Range (005WD=5" H₂O, 010WD=10" H₂O, 015WD=15" H₂O, 001PD=1 PSI)
 Output Configuration (100=0.5 to 4.5V, 200=0.250 to 4V)

深圳市新世联科技有限公司